

PSF 200-600 Series

TECHNICAL DATA:

Aluminum


- Extrusion – PS uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts are: (6063-T5, T6, T52) as per ASTM B221
- Profiles can be customised as per following alloys (6061-T5, T6, T51) (6105-T5, T6) (6005-T5), (6005A-T5, T61), as per ASTM B221

Primary Gasket/Seal


- Single Durometer: 70 Shore A, ASTM D2000
- Available in standard Black Colour

Secondary Seal

- Material – PVC, ASTM D2000
- Durometer – 65 Shore A

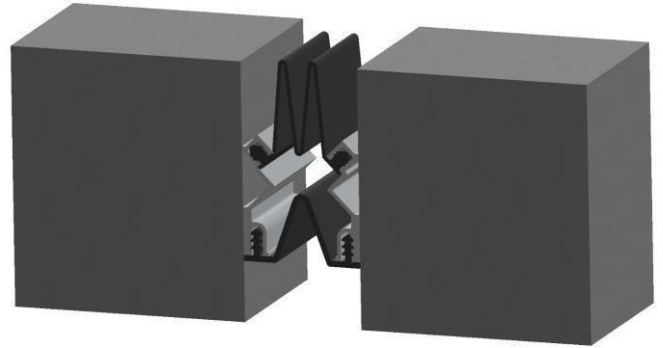

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE	BLOCKOUT WIDTH	BLOCKOUT HEIGHT
PSF-200	51mm	32mm	76mm	51mm	N/A	N/A
PSF-400	102mm	32mm	152mm	102mm	N/A	N/A
PSF-600	152mm	44mm	229mm	152mm	N/A	N/A

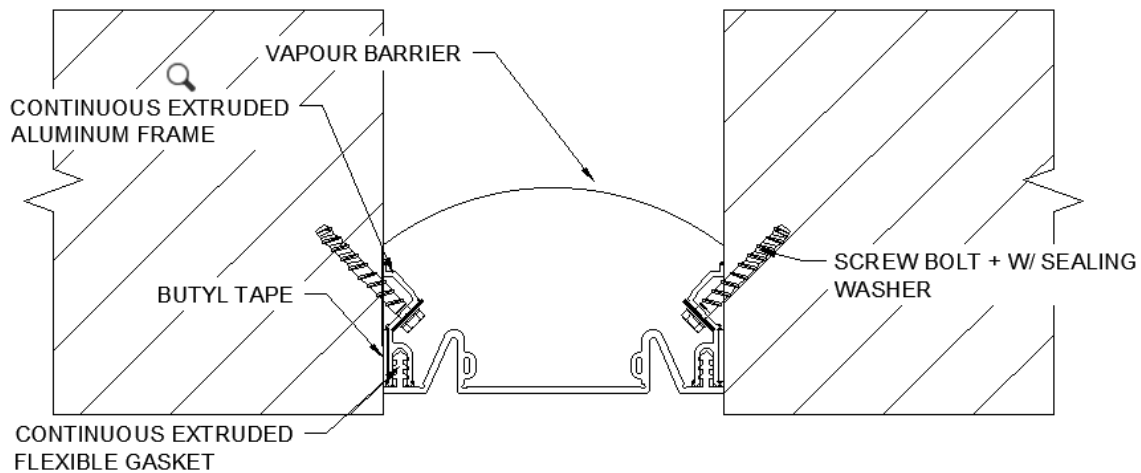

PSF-200-600